Terbit *online* pada laman web jurnal : http://inomet.ft.unand.ac.id

INoMeT: Jurnal Inovasi Rekayasa Mekanikal dan Termal

| ISSN (Print) xxxx-xxxx | ISSN (Online) xxxx-xxxx |

Artikel penelitian

The Effect of Cutting Speed On Cutting Force and Temperature in Turning Process

Hendri Yanda

Department of Mechanical, Faculty of Engineering, Andalas University, Padang-25163, Indonesia

INFORMASI ARTIKEL

Sejarah Artikel:
Diterima Redaksi: 15 Juni 2023
Revisi Akhir: 29 Juni 2023
Diterbitkan *Online*: 30 Juni 2023

KATA KUNCI

Finite element method

Three-dimensional of orthogonal cutting

AISI 1045

Carbide tool

KORESPONDENSI

E-mail: hendriyanda@eng.unand.ac.id

A B S T R A C T

In recent years, the applications of finite element method (FEM) in metal cutting operations have proved to be effective in studying the cutting process and chip formation. In particular, the simulation results can be used for both researchers and machine tool makers to optimize the cutting process and designing new tools. Many researches were done on two-dimensional simulation of cutting process because the three-dimensional versions of FEM software required more computational time. The present work aims to simulate three-dimensional orthogonal cutting operations using FEM software of Deform-3D. Orthogonal cutting finite element model simulations were conducted to study the effect of cutting speed on effective-stress, strain and temperature in turning process. AISI 1045 was used as work material and cutting tool was TNMA 332 (uncoated carbide tool, SCEA = 0; BR = -5; SR = -5 and radius angle 60º). The emphasis on the designed geometries are limited to the changes in the cutting speed between 100 m/min and 450 m/min. The machining parameters of feed rate and depth of cut were kept constant at 0.35 mm/rev and 0.3 mm respectively. The simulation results show that by increasing the cutting speed causes a decrease in cutting force and effective-strain. On the other hand, increasing in cutting speed will increase effective-strain and temperature of the chip formed.

1. INTRODUCTION

Finite Element Analysis (FEA) technique was the first introduced in 1960s and has been widely used to analyze in designing tools and forming processes. Based on the success of FEM simulations for bulk forming processes, many researchers developed their own FEM codes to analyze metal cutting processes during the early 1980s up to now [1] [4] [6] [11] [12]. Cerenitti et al [1] assumed a rigid sharp tool and elasto-plastic workpiece, and defined a node separation criterion based on the geometry of the element approaching the cutting edge. Cerenitti et al. [3] used an early version of a commercial implicit FEM code "DEFORM-2D™". This code uses four-node quadrilateral elements and is based on static Lagrangian formulation. Today, DEFORM-3D™ code is commonly used by researchers and industry in machining simulation Columbus [2]. Applications of FEM models for machining can be divided into six groups: 1) tool edge design, 2) tool wear, 3) tool coating, 4) chip flow, 5) burr formation and 6) residual stress and surface integrity. The direct experimental approach to study machining processes is expensive and time consuming. For solving this problem, the finite element methods are most frequently used. Modeling tool wear using FEM has advantages over conventional statistical approach because it requires less experimental effort and it provides useful information such as deformations, stresses, strain and temperature in chip and the workpiece, as well

https://doi.org/10.25077/xxxxx
Attribution-NonCommercial 4.0 International. Some rights reserved

as the cutting force, tool stress and temperature on the tool working under specific cutting parameter [9].

2. METHODOLOGY

This paper presents the application of Deform-3D in simulation orthogonal cutting process of AISI 1045 and carbide tool at various cutting speeds while the other machining parameters of feed rate and depth of cut were kept constant. The commercial software Deform-3D for deformation analysis was used to simulate orthogonal metal cutting process. It is based on an updated Lagrangian formulation and employs an implicit integration scheme. Figure 1 shows geometry and schematic of orthogonal cutting condition model.

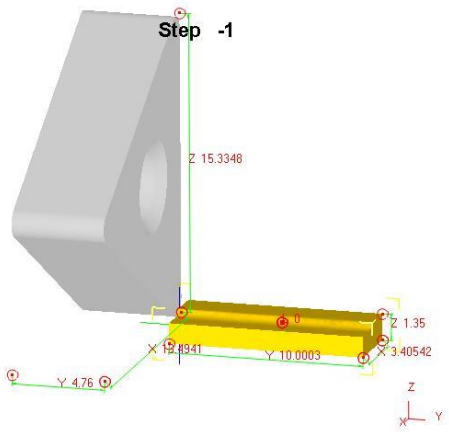

Figure 1 Geometry and schematic of orthogonalcutting condition model

The workpiece material was AISI 1045 carbon steel. AISI 1045 carbon steel had been selected as the workpiece material in this study because it was well characterized and had been the focus of many recent modeling studies. Table 1 show flow stress models for AISI 1045 carbon steel used in the simulation.

The tool is modeled as a rigid body, so there are no mechanical properties need to be assigned and only thermal properties are needed. The mechanical properties of AISI 1045 steel and carbide cutting tool are shown in Table 3. The tool was defined to be a rigid body which considers thermal transfer for modeling the cutting temperature field.

Deform software had been used to simulate the effect of cutting speed on the parameter of machining when turning AISI 1045 using uncoated carbide cutting tool. The simulations were performed by changing the cutting speed while the feet rate and depth of cut were kept constant at 0.35 mm/rev and 0.3 mm respectively as shown in Table 2.

Table 2 Input Parameters in the simulation process

Parameters	
Cutting Speed (m/min)	100, 150, 200, 250, 300, 350, 400, 450
Feed Rate	0.35 mm/rev
Depth of cut	0.3 mm

Table 3 Cutting condition to the simulation models

Workpiece geometry	
Depth of cut	0,3
Width of cut (mm)	3,4
Length of workpiece	10
Workpiece properties (AISI 1045; Poisson's ratio, 0.30)	
Modulus of elasticity [7] (GPa)	215, 210, 165, 160
at temperature (°C)	20, 200, 400, 600
Thermal expansion [6] ($\cdot 10^5$ $°C^{-1}$)	1.1 ; 1.2; 1.3; 1.4; 1.5
at temperature (°C)	100; 200; 300; 400; 500; 600; 700
Heat capacity [7] (N/mm2 ° C)	3.7 ; 3.8; 4.3; 5.1; 8.8; 8.3; 7.5 6; 5.4
at temperature (°C)	25; 125; 325; 525; 725; 825; 875; 925
Thermal conductivity [10] (W/m °C)	42; 43; 38; 35; 29; 28; 24; 23
at temperature (°C)	25; 100; 300; 500; 700; 800; 900; 950; 1000

The simulation results of cutting force, effective-stress, strain and chip temperature on the cutting were studied and analyzed. The operation is simulated using a nose angle 60° and without used of coolant. The three-dimensional finite element model was generated under a plane strain assumption because the width of cut was larger than the undeformed chip thickness in this orthogonal

cutting arrangement [12]. The flow stress behavior of the work material and the contact conditions, physical and thermo-mechanical properties of the workpiece and tool materials, and cutting conditions are predefined and input to the simulation model as listed in Table 3.

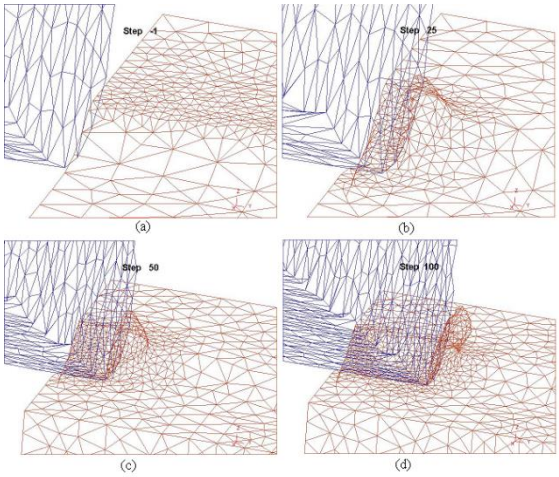

Figure 2 (a) Initial mesh and tool indentation, (b) Chip formation at step 25, (c) Chip formation at step 50, (d) Developed continues chip at step 100

Displacement, shape and surface mesh of tool and workpiece at initial mesh in the beginning of the cutting operation until the developed chip formation at step 100 as illustrated in Figure 2 a , 2b, 2c and 2d respectively. The workpiece and the tool are characteristized by non uniform mesh distribution in the simulation. Very small element is required in the contact area between tool and workpiece because of very large temperature gradient and stress that will develop in this region during the simulation. Figure 3 shows an example of simulation result for cutting speed 100 m/min that was found from 300 steps of simulation running and needs longer time simulation.

Displacement, shape and surface mesh of tool and workpiece at initial mesh in the beginning of the cutting operation until the developed chip formation at step 100 as illustrated in Figure 2 a , 2b, 2c and 2d respectively.

The workpiece and the tool are characteristized by non uniform mesh distribution in the simulation. Very small element is required in the contact area between tool and workpiece because of very large temperature gradient and stress that will develop in this region during the simulation. Figure 3 shows an example of simulation result for cutting speed 100 m/min that was found from 300 steps of simulation running and needs longer time simulation.

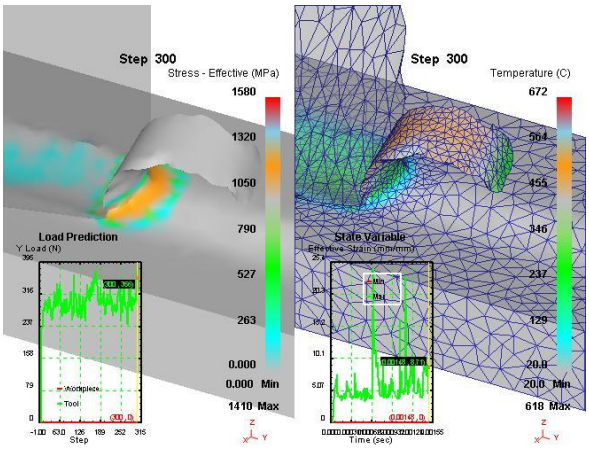

Figure 3 Example of the simulation result for cutting speed at 200 m/min (for running in 300 step)

3. RESULT AND DISCUSSION

3.1. Detailed Study of FEM Simulation

Figure 4a shows the simulation result for displacement. The longer the chip generated caused higher mesh displacement found as at the end of chip formed. The biggest deformation was occurred on the primary deformation zone, followed by the secondary deformation zone. This also cause higher stress occurred in this section. This result is agreeable with Kalhori [8] where the major deformation during cutting process were concentrated in two region close to the cutting tool edge, and the bigger deformation were occurred in the primary deformation zone, followed by secondary deformation zone, sliding region and sticking region as shown in Figure 4b.

Stress and temperature can be analyzed in detail based on its contour, this will give the value of stress

 https://doi.org/10.25077/xxxxx

and temperature for each of lines or points in all region of workpiece and chip formed as shown in Figure 5 and Figure 6.

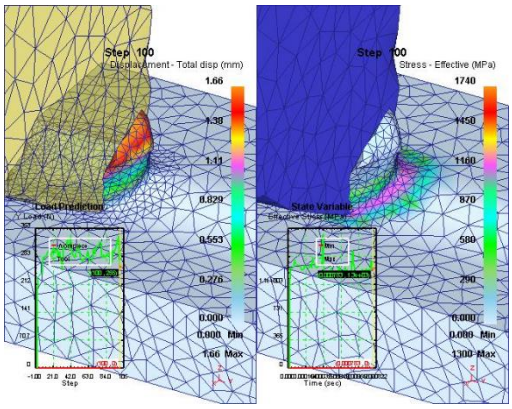

Figure 4 The simulation result for (a) displacement and cutting force, (b) Stress and strain at 100 m/min (step 100

Figure 5 shows that on the primary deformation zone, higher deformation is experienced, which resulted in higher stress. It can be seen that the contour of stress where are higher at line of H (1520 MPa) and G (1300 MPa).

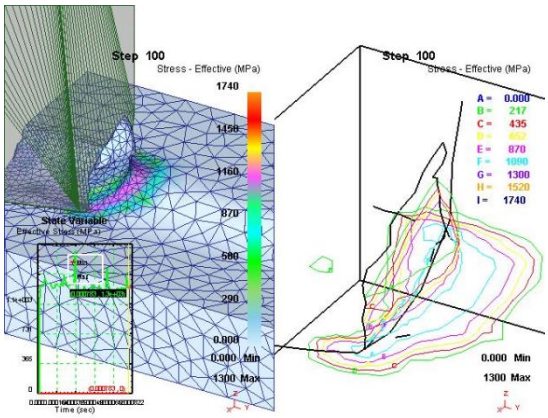

Figure 5 The simulation result for stress contour at 100 m/min (Step 100)

In the sticking region, the workpiece material adheres to the tool and shear occurs within the chip, the frictional force is high and consequently is generated. Therefore, the highest temperature in the chip usually occurs in the sliding region. Figure 6 shows contour of temperature generated in each region, and higher temperatures are around at line of G (439ºC) and H (509ºC) on sliding region.

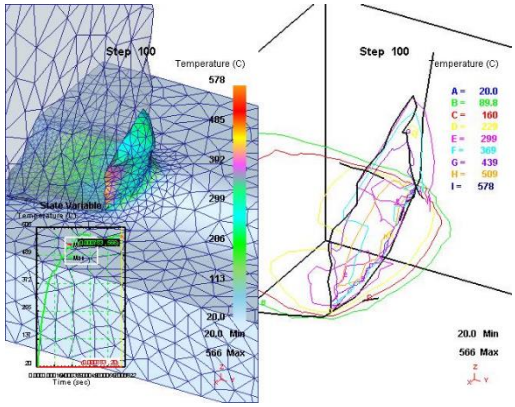

Figure 6 The simulation result for temperature contour at 100 m/min (Step 100)

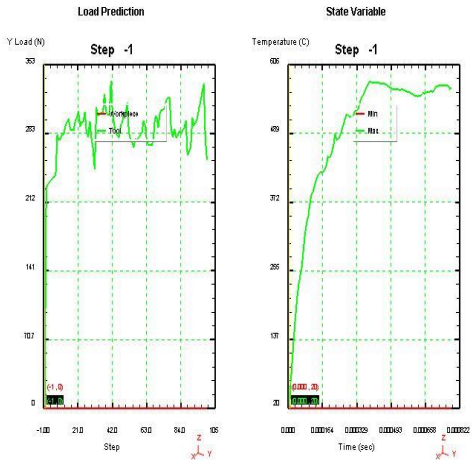

Figure 7 The graph result of simulation for cutting force and temperature contour for cutting speed 100 m/min (step 100)

Figure 7 shows the cutting force that generated during the cutting simulation, the cutting force remained constant (fluctuation on horizontal direction) after step 20, the same phenomenon is also observed in the gradient temperature, it remained constant after Step 42. Bigger fluctuation are found in effective-strain, therefore more

difficult to predict the strain value compared to predict the effective-stress as given in Figure 8

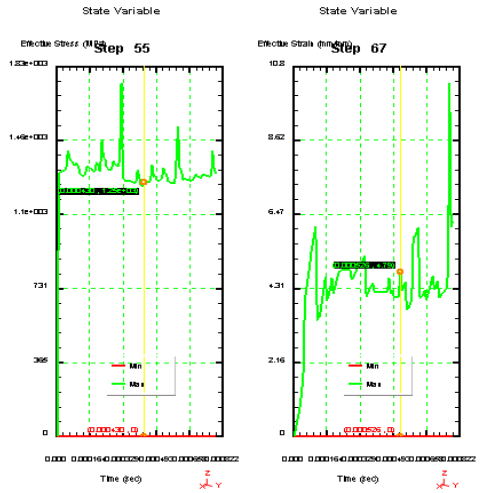

Figure 8 The graph result of simulation for cutting effective-stress and strain for cutting speed 100 m/min (step 100)

3.2. Effect of Increasing of Cutting Speed on Machining Result

The cutting force, effective stress, strains and chip temperature at various cutting speed were studied and analyzed as shown in Table 4. The maximum and minimum value of each cutting parameter for cutting force, effective-stress, effective-strain and generated chip temperature in this simulation were plotted in Figure 9, Figure 10, Figure 11 and Figure 12 respectively. Table 4 shows the simulation result for cutting speed for 100 m/s - 450 m/min.

Figure 9 shows that by the increasing of the cutting speed, it will decrease the cutting force. This is agreeable with theory that by the increasing of cutting speed will soften the material, therefore this will make material easier to cut in higher cutting speed condition.

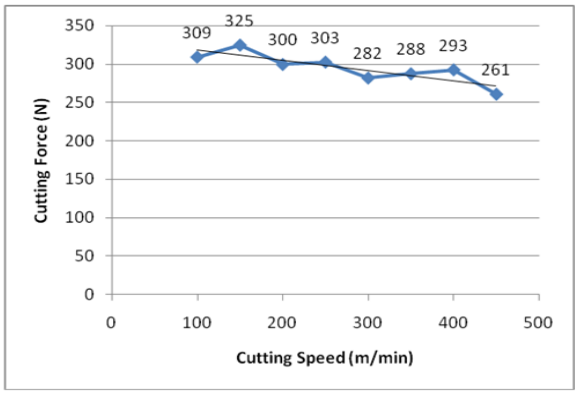

Figure 9 Cutting speed vs cutting force

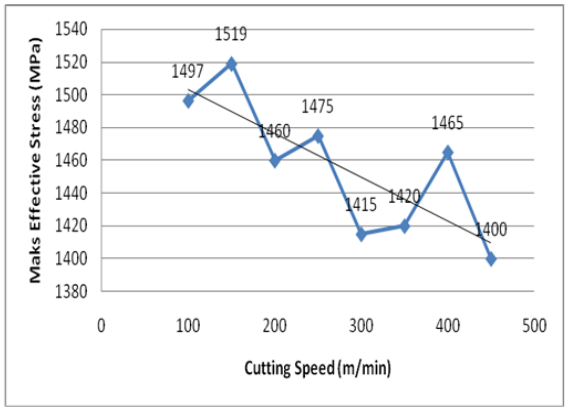

Figure 10 Cutting speed vs maximum effective-stress

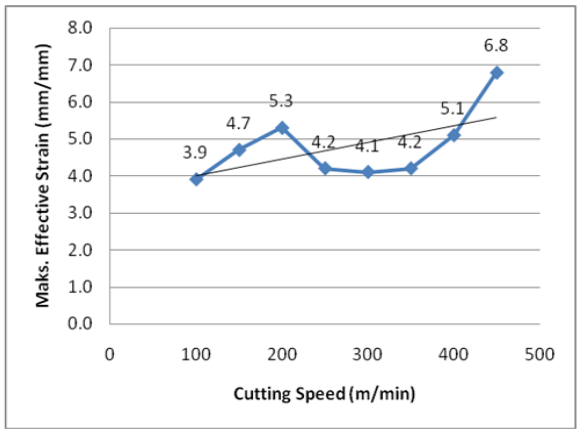

Figure 11 Cutting speed vs chip temperature

 https://doi.org/10.25077/xxxxx

Table 4 The cutting force, effective stress, strain and chip temperature at various cutting speed were studied and analyzed (DOC = 0,3 mm: feed = 0.35 mm/tooth)

No	Cut. Speed (m/min)	Av. Force (N)	Av. Eff. Stress (MPa)	Av. Strain (mm/mm)	Av. Temp (C)
1	100	309	1497	3.9	516
2	150	325	1519	4.7	660
3	200	300	1460	5.3	735
4	250	303	1475	4.2	750
5	300	282	1415	4.1	801
6	350	288	1420	4.2	801
7	400	293	1465	5.1	961
8	450	261	1400	6.8	835

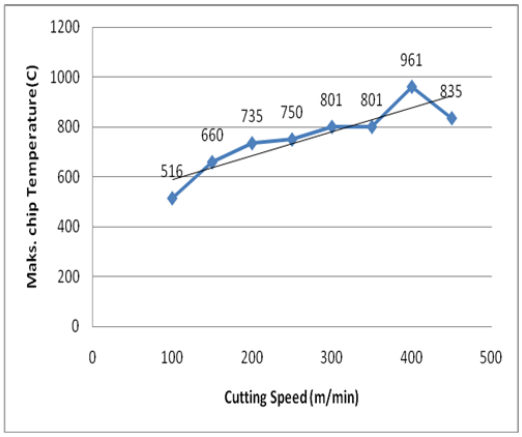

Figure 12 Cutting speed vs maximum effective-strain

Figure 10 shows that by increasing the cutting speed also will reduce the effective-stress. Increase of cutting speed from 100 m/min to 450 m/min will reduce the effective-stress from 1497 MPa to 1400 MPa. This is also agreeable with theory that gives formula :

$$\sigma = F/A$$

Where σ = stress, F as cutting force and A is area, stress and cutting force are positif corelation, if cutting force increase so stress also will increase. Any of previous researches seldom show the correlation between increase of cutting force and effective stress in their simulation. Cerenitty et al. [1] was only show correlation between cutting speed and srain rate and temperature.

The good result were get for the graph of temperature where the increasing of cutting speed will increase the generated temperature on chip as given in Figure 12. This is agreeable with finding from Cerenitti et al. [1] where the maximum temperature of chip are increasing with increasing cutting speed. This is due to the increase of required energy for increasing the cutting processes. More heat will be generated as increasing of cutting speed, consequetly the maximum temperature on the tool and workpiece surface increase ate higher cuting speed. As given in the Figure 12, the increase of cutting speed from 100 m/min to 450 m/min lead to an increase of chip temperature from 516°C to 835°C. This is very probable to occur because the most of heat or generated temperature is carried away by the chip. The theory also tell that during machining by cutting, it is assumed that all the cutting energy is converted to heat and, therefore, a considerable amount of heat is generated at the following three distinch zones as given Figure 13, those are 1). Shear zone (75%); 2). Chip sliding on the tool face (20%); c). Tool sliding on the workpiece machined surface (5%) which neglected for perfectly sharp cutting tools. The maximum heat is produced at shear zone because of the plastic deformation of the metal, practically all of this heat is carried away by the chip [5].

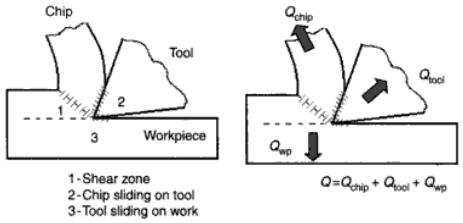

Figure 13 Heat generated and heat dissipatuion in metal cutting [5]

Based on theory, the graph of effective-strain should remain constant, but in this simulation, as given in Figure 11, the increasing cutting speed cause a sligh increase effective-strain, this was caused by difficulty in getting the average of effective-strain value, because there were high fluctuation in resulted graphs.

4.CONCLUSIONS

The distribution of cutting force, effective stress and temperature obtained from simulations are in good agreement with the result given in literature. From simulation, there can be concluded that by increasing of the cutting speed in turning of AISI 1045 using Tungsten Carbide (CW) will decreasing of cutting force and effective stress. In the different case, increasing of cutting speed cause increasing of generated temperature on chip.

ACKNOWLEDGEMENT

The authors would like to thank to Head of Mechanical Engineering Department, Engineering Faculty, Andalas University.

REFERENCE

[1] A.E. Cerenitti, B.P. Fallbohmer, W. C.W.T Wu & B.T. Altan, 1996. Application of 2D FEM to Chip Formation in Orthogonal Cutting, *Journal of materials Processing Technology Volume 59*: 169-180.

[2] O.H. Columbus, 2007. *Deform™ - 3D Machining (Turning) Lab*, Scientific Forming Technologies Corporation.

[3] A.E. Cerenitti, C. Lazzaroni, L. Menegardo. & T. Altan., 2000. Turning Simulation Using a Three- Dimensional FEM Code, *Journal of materials Processing Technology volume 98*: 99-103.

[4] E. El-Magd., C. Treppmann, M. Korthauer, 2003. Constitutive modeling of CK45N, AlZnMgCu1.5 and Ti–6Al–4V in a wide range of strain rate and temperature. *J. Physique Volume 110*: 141–146.

[5] H. El-Hofy (2006), *Fundamentals of Machining Processes: Conventional and Nonconventional Processes,* Published by CRC Press, http://books.google.com.my/books?id=ZdQEZ5pyCv4C&vq=cutting+speed&dq=affecting,+temperature,+cutting+speed&source=gbs_summary_s&cad=0. Date of download : November, 10th 2008

[6] I.S. Jawahir, 2008. An Intermediatary Level Short Course on Machining Process Modelling and Optimization for Improved Productivity, Machining Research Laboratory Center for Manufacturing, *Department of Mechanical Engineering Lexington*, USA

[7] G.R. Johnson, W.H. Cook, 1983. A constitutive model and data for metals subjected to large strains, high strain rates and high temperature. In Proceedings of the 7th International Symposium on Ballistics, The Hague, The Netherlands, pp. 541–547 (American Defense Preparedness Association, The Netherlands).

[8] V. Kalhori 2001, Modelling and Simulation of Mechanical Cutting, Doctoral Thesis, *Institutionen for Maskinteknik*, Sweden.

[9] J. Mackerle. 1999. Finite Element Analysis and Simulation of Machining: a Bibliography (1976 – 1996), *Journal of Materials Processing Technology Volume 86*: 17-44.

[10] K. Maekawa, T. Shirakashi and E. Usui, 1983. Flow stress of low carbon steel at high temperature and strain rate (part 2) – flow stress under variable temperature and variable strain rate. Bull. *Japan Soc. Precision Engineering Volume 17*:167–172.

[11] T.D. Marusich & Ortiz, 1995. Modeling and Simulation of High-Speed Machining, *To appear: International Journal Num. Metallurgy Engineering*.

[12] C. Shet. 2000. Finite Element Analysis of the Orthogonal Metal Cutting Process, *Journal of Materials Processing Technology Volume 105*: 95-109

 https://doi.org/10.25077/xxxxx